


Maximum pressure in the tank	0.3 MPa
Maximum heating water temperature in the tank	90 °C
Maximum pressure in the exchanger	1.0 MPa
Maximum heating water temperature in the exchanger	110 °C

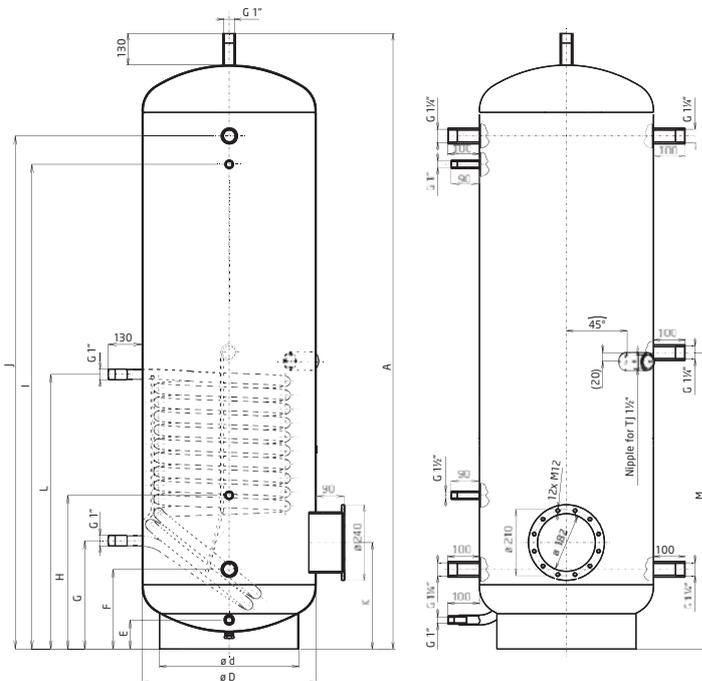

Socket G 1½" suitable for electrical heating element upon solar heating.

Volume [l]	Diameter D [mm]	Diameter d [mm]	A	E	F	G	H	I	J	K	L	M
500	600	440	1990	90	260	350	494	1545	1635	344	878	948
750	750	550	2020	90	272	362	506	1557	1647	356	890	960
1000	850	600	2053	90	287	377	521	1572	1662	371	905	975

NAD 500 v4 NAD 750 v4 NAD 1000 v4

NAD v4 accumulation tanks may be provided with a flange with 210 mm screw spacing for a TPK heating unit installation. More than one flange may be installed. Changes in the number and location of sockets are optionally available. The flange is plugged in the basic design.

Integrated heat exchanger with the surface 1.5 m² for other heating source connection (for example solar system). Accumulation tanks are supplied with a high-quality insulation Symbio made of polyester fleece.

DRAŽICE
MEMBER OF THE NIBE GROUP