

ELECTRIC STORAGE WATER HEATERS

Stationary 0.6 MPa - heating element built in to flange 2.2 kW


Stationary 0.6 MPa - heating element built in to flange 3-6 kW

Circulation in all types.

Type	A	B	C	D
OKCE 100 S/2,2 kW	815	865	517	116
OKCE 125 S/2,2 kW	980	1034	517	116

Type	A	B	C	D	E	F
OKCE 160 S/2,2 kW	1018	952	509	168	65	248
OKCE 200 S/2,2 kW	1328	1264	844	168	65	248
OKCE 250 S/2,2 kW	1508	1448	1048	168	68	248

Type	A	B	C	D	E	F
OKCE 160 S/3-6 kW	1018	952	509	210	65	280
OKCE 200 S/3-6 kW	1328	1264	844	210	65	280
OKCE 250 S/3-6 kW	1508	1448	1048	210	68	280

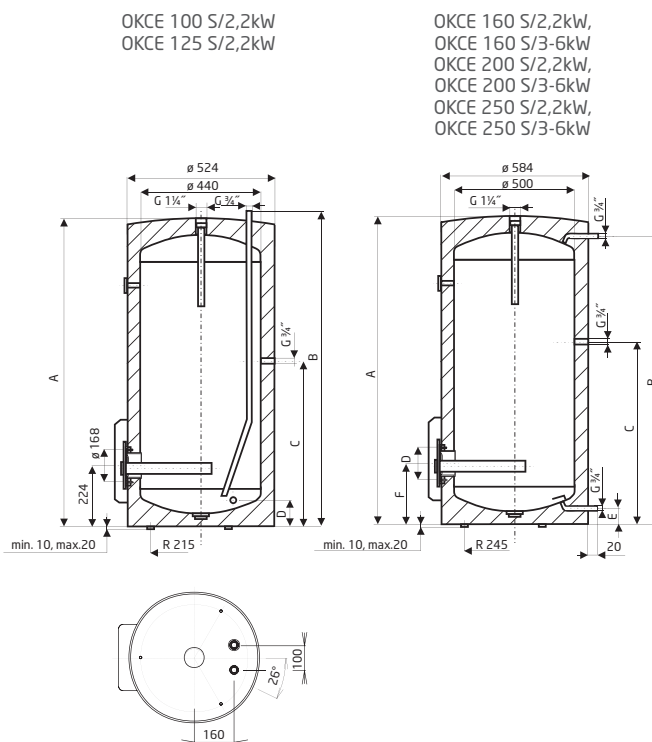

OKCE 100 S/2,2kW
OKCE 125 S/2,2kW

OKCE 160 S/2,2kW,
OKCE 160 S/3-6kW
OKCE 200 S/2,2kW,
OKCE 200 S/3-6kW
OKCE 250 S/2,2kW,
OKCE 250 S/3-6kW

OKCE 100 S/2,2 kW
OKCE 125 S/2,2 kW
OKCE 160 S/2,2 kW
OKCE 200 S/2,2 kW
OKCE 250 S/2,2 kW
OKCE 160 S/3-6 kW
OKCE 200 S/3-6 kW
OKCE 250 S/3-6 kW



Type	OKCE 100 S/ 2,2 kW	OKCE 125 S/ 2,2 kW	OKCE 160 S/ 2,2 kW / 3-6 kW	OKCE 200 S/ 2,2 kW / 3-6 kW	OKCE 250 S/ 2,2 kW / 3-6 kW
Volume [l]	100	125	160	220	250
Weight [kg]	44	52	60/66	76/82	86/92
Max. operating pressure of the storage tank [MPa]	0.6	0.6	0.6	0.6	0.6
Maximum HUW temperature [°C]	80	80	80	80	80
Heating period with ele. en. from 10 °C to 60 °C [h]	3	3.5	4.5/3.2-1.6	5.5/4-2	7/5-2.5
Voltage [V/Hz]	1 PE-N~230/50	1 PE-N~230/50	1 PE-N~230/50	1 PE-N~230/50	1 PE-N~230/50
Voltage [V/Hz]	-	-	3 PE-N~400/50	3 PE-N~400/50	3 PE-N~400/50
Electrical protection	IP 44	IP 44	IP 44	IP 44	IP 44
Heat loss [kWh/24h]/energy efficiency class	0.88/C	1.09/C	1.39/C	1.4/B	1.72/B