


Maximum pressure in the tank	0.3 MPa
Maximum heating water temperature in the tank	90 °C

NAD 500 v2 NAD 750 v2 NAD 1000 v2

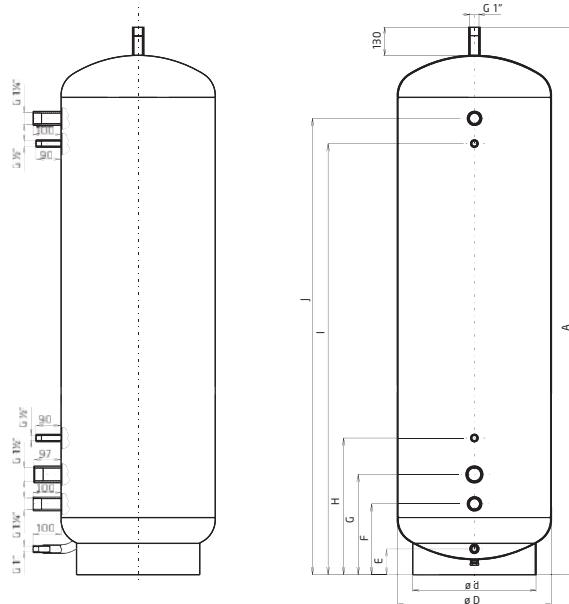

Volume [l]	Diameter D [mm]	Diameter d [mm]	A	E	F	G	H	I	J
500	600	440	1990	90	260	364	494	1545	1635
750	750	550	2020	90	272	376	506	1557	1647
1000	850	600	2053	90	287	391	521	1572	1662

Accumulation tanks **NAD v2** may be provided with G 1½" optional sockets. A G 1½" socket allows the installation of a TJ 6/4" electric heating unit. The number of sockets may vary and may be customized upon customer's requirements. The socket is plugged in the basic design.

Accumulation tanks are supplied with a high-quality insulation Symbio made of polyester fleece.

 **DRAŽICE**
MEMBER OF THE NIBE GROUP